


Assembly Instructions

HSK-M-EMV-D

Option 1

Feed-through of cable and shield (braided or foil)


- + Expose shield approximately 7/16" (10mm)
- + Insert cable into fitting until the shield reaches the contact position
- + Tighten dome nut

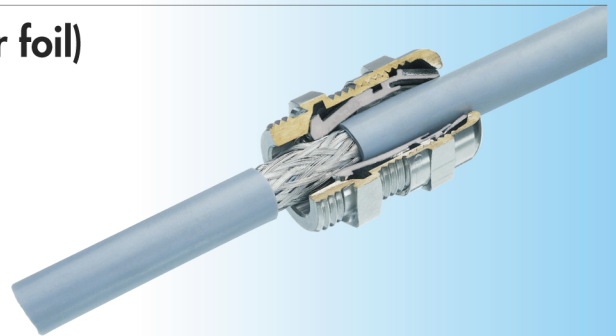

Option 2

Feed-through of shield (braided or foil)

- + Remove cable jacket to expose the shield as required
- + Insert cable into fitting until the shield reaches the contact position
- + Tighten dome nut

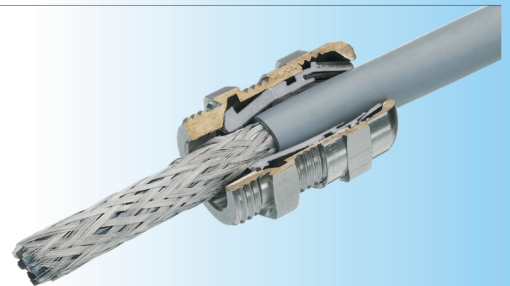

Option 3

Termination of the braided shield in the fitting

- + Strip cable jacket and braided shield to different lengths
- + For small diameter cables fold the braided shield back over the cable jacket
- + Insert cable into fitting until the shield reaches the contact position
- + Tighten dome nut

