




Elongated Thread Available Upon Request

Hex Plugs: Nickel Plated Brass			Thread Type & Size	Dimensions Inches (mm)			
Part Numbers				H	F	TL	
-4°F to 203°F (-20°C to 95°C)	-4°F to 356°F (-20°C to 180°C)	-4°F to 356°F (-20°C to 180°C)		Overall Height	Wrench Flat	Thread Length	
			See page 56 for thread specs				
without O-Ring	w/ Buna-N O-Ring	w/ FKM O-Ring					
HP-07-BR	HP-07-BR-B	HP-07-BR-V		PG 7 / 1/4" NPT	.31 (8)	.55 (14)	.20 (5)
HP-09-BR	HP-09-BR-B	HP-09-BR-V		PG 9	.35 (9)	.67 (17)	.24 (6)
HP-11-BR	HP-11-BR-B	HP-11-BR-V		PG 11	.37 (9.5)	.79 (20)	.24 (6)
HP-13-BR	HP-13-BR-B	HP-13-BR-V		PG 13 / 13.5	.39 (10)	.87 (22)	.26 (6.5)
HP-16-BR	HP-16-BR-B	HP-16-BR-V		PG 16	.39 (10)	.94 (24)	.26 (6.5)
HP-21-BR	HP-21-BR-B	HP-21-BR-V		PG 21	.41 (10.5)	1.18 (30)	.28 (7)
HP-29-BR	HP-29-BR-B	HP-29-BR-V		PG 29	.49 (12.5)	1.61 (41)	.31 (8)
HP-36-BR	HP-36-BR-B	HP-36-BR-V		PG 36	.51 (13)	1.97 (50)	.31 (8)
HP-42-BR	HP-42-BR-B	HP-42-BR-V		PG 42	.59 (15)	2.28 (58)	.35 (9)
HP-48-BR	HP-48-BR-B	HP-48-BR-V		PG 48	.65 (16.5)	2.56 (65)	.39 (10)
HM-12-BR	HM-12-BR-B	HM-12-BR-V		M12 x 1.5	.37 (9.5)	.55 (14)	.26 (6.5)
HM-16-BR	HM-16-BR-B	HM-16-BR-V		M16 x 1.5	.35 (9)	.75 (19)	.24 (6)
HM-20-BR	HM-20-BR-B	HM-20-BR-V		M20 x 1.5	.37 (9.5)	.87 (22)	.24 (6)
HM-25-BR	HM-25-BR-B	HM-25-BR-V	M25 x 1.5	.41 (10.5)	1.18 (30)	.28 (7)	
HM-32-BR	HM-32-BR-B	HM-32-BR-V	M32 x 1.5	.49 (12.5)	1.61 (41)	.31 (8)	
HM-40-BR	HM-40-BR-B	HM-40-BR-V	M40 x 1.5	.51 (13)	1.81 (46)	.31 (8)	
HM-50-BR	HM-50-BR-B	HM-50-BR-V	M50 x 1.5	.59 (15)	2.17 (55)	.35 (9)	
HM-63-BR	HM-63-BR-B	HM-63-BR-V	M63 x 1.5	.65 (16.5)	2.76 (70)	.39 (10)	



O-Ring needed for Type NEMA 4x & 6 Rating.



Also, all Nickel Plated Brass & Stainless Steel HM (Hex) Hole Plugs are available with Ex-d approval!

Hex Plugs also available with the following approvals:



ATEX

www.SealconEX.com


Accessories - (Hex) Hole Plugs (303) Stainless Steel - PG & Metric Threads

Hex Plugs: (303) Stainless Steel - IP 68			Thread Type & Size	Dimensions Inches (mm)			
Part Numbers				H	F	TL	
-4°F to 203°F (-20°C to 95°C)	-4°F to 356°F (-20°C to 180°C)	-76°F to 356°F (-60°C to 180°C)		Overall Height	Wrench Flat	Thread Length	
			See page 56 for thread specs				
w/ Buna-N O-Ring	w/ FKM O-Ring	w/ Silicone O-Ring					
HP-07-SS-B	HP-07-SS-V	HP-07-SS-S		PG 7 / 1/4" NPT	.31 (8)	.55 (14)	.20 (5)
HP-09-SS-B	HP-09-SS-V	HP-09-SS-S		PG 9	.35 (9)	.67 (17)	.24 (6)
HP-11-SS-B	HP-11-SS-V	HP-11-SS-S		PG 11	.37 (9.5)	.79 (20)	.24 (6)
HP-13-SS-B	HP-13-SS-V	HP-13-SS-S		PG 13 / 13.5	.39 (10)	.87 (22)	.26 (6.5)
HP-16-SS-B	HP-16-SS-V	HP-16-SS-S		PG 16	.39 (10)	.94 (24)	.26 (6.5)
HP-21-SS-B	HP-21-SS-V	HP-21-SS-S		PG 21	.41 (10.5)	1.18 (30)	.28 (7)
HP-29-SS-B	HP-29-SS-V	HP-29-SS-S		PG 29	.49 (12.5)	1.61 (41)	.31 (8)
HP-36-SS-B	HP-36-SS-V	HP-36-SS-S		PG 36	.51 (13)	1.97 (50)	.31 (8)
HM-12-SS-B	HM-12-SS-V	HM-12-SS-S		M12 x 1.5	.37 (9.5)	.55 (14)	.26 (6.5)
HM-16-SS-B	HM-16-SS-V	HM-16-SS-S		M16 x 1.5	.35 (9)	.75 (19)	.24 (6)
HM-20-SS-B	HM-20-SS-V	HM-20-SS-S		M20 x 1.5	.37 (9.5)	.87 (22)	.24 (6)
HM-25-SS-B	HM-25-SS-V	HM-25-SS-S		M25 x 1.5	.41 (10.5)	1.18 (30)	.28 (7)
HM-32-SS-B	HM-32-SS-V	HM-32-SS-S		M32 x 1.5	.49 (12.5)	1.61 (41)	.31 (8)
HM-40-SS-B	HM-40-SS-V	HM-40-SS-S	M40 x 1.5	.51 (13)	1.81 (46)	.31 (8)	



These Plugs are designed to fit and seal European PG threads per DIN 46320-FS/PA and Metric threads per DIN 46320/Ms.

They are made of Stainless Steel and are available with Buna-N, FKM or Silicone O-Ring. Also available in Nylon, Nickel Plated Brass, or 316L Stainless Steel. (Elongated Available Upon Request).

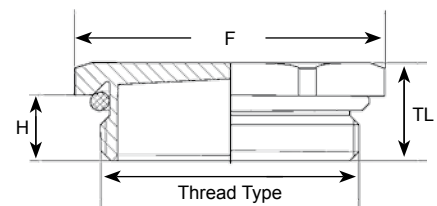

Hex Plugs also available with the following approvals:



ATEX

www.SealconEX.com



Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.

For Material Specifications and Approval Information refer to page 52.