



SEALCON

800-456-9012 / 303-699-1135
www.sealconusa.com/med

Two Outstanding Companies!
One Dependable Source!
Your Cable & Accessories Solution House!
We Provide Complete Solutions for your Application Needs!



HI-TECH CONTROLS, INC.

800-677-8942 / 303-680-5159
www.hitechcontrols.com/med



Servo Motors



Renewable Energy



Food & Beverage



High Temperature



Robotics



Petro-Chemical



Cables & Wires

One Stop Source for Wires & Cables!
Types: Control, Power, Hi-Flex, Track, High / Low Temp., Halogen-free, Servo, VFD, Robotic, Composite, Ribbon, Data (CAT), Single Conductor, Etc!
Approvals: UL, TC-ER & CSA CIC/TC, WTTTC, CSA FT4, NFPA 79 2007, CE, VDE, HAR, AWM, MTW, etc.

2D/3D CAD!

VO Rated!

Featured Products

Unsurpassed Customer Service!

One-Stop Shopping!

Samples Available!

No Minimum Orders!

Call for a Catalog!

Contact Us Today to Receive Your

Sealcon or Hi-Tech Controls 2011 Catalogs!

31,000+ Items in Stock!

\$35 Million Inventory!



NEW Exios Armored / Hazardous (Explosion) Proof Cable Glands. 2011 Flyer

NEW ULf1 Strain Relief Fittings, Cable Glands, Conduit & Accessories. 2011 Catalog

EXIOS Strain Relief Fittings, Cable Glands for Hazardous/Explosion Proof Areas




- **Approvals:** IECEX, ATEX, Ex-d / Ex-e / Ex-tD
- Zone 1, Zone 2, Zone 20, Zone 21 and Zone 22.
- Gas Groups IIA, IIB and IIC – Apparatus Group III.
- -76°F to 221°F (-60°C to +105°C)
- IP 68 (5 BAR), EN 60529.



Bottom View

Solar / Outdoor Photovoltaic Strain Relief, Cable Glands, UL f1 (746C), (*Black Nylon Dome and Flex Only)

New TPE Membrane Style Multi-Hole. Use only the Holes you need while still maintaining a NEMA 6 (IP 68) rating.

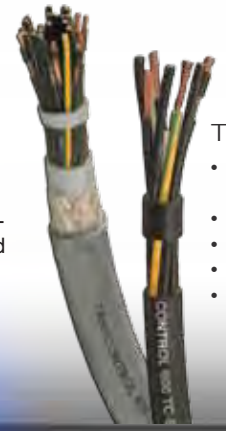

TRAYCONTROL 600 / 600-C

- Flexible and Oil-Resistant, Shielded, and EMI Preferred Type.
- TRAY CABLE for Open Installation.
- TC-ER, PLTC-ER, NFPA 76 Edition 2007.
- 600 V (WTTTC 1000 V)
- Suitable for dry, damp, wet and underground environments, outdoors and in pipes.

Silicone Cable SiHF Multi-Conductor

- Halogen-free, heat-resistant.
- -76°F to 356°F (-60°C to 180°C)
- Shielded version also available.

Circular Connectors

Sizes: M12, M16, M23, M27, M40, RJ45, Industrial Ethernet, PoE, Twintus, Etc.
Signal: 3 - 28 pins (8 - 20 Amps)
Power: 6 & 8 pins (8 - 55 Amps)
Types: Standard, Straight, Elbow, Push-Pull, Panel Mount, Stainless Steel, Over-mold, RJ45 & PoE (Power Over Ethernet)
Applications: Robotic, Medical, Motion Technology, Automation, Packaging, Sensors, Renewable Energy, etc.



Our Service makes the Difference!

Conduit System

High Pull-Out Resistance, Robust Performance, Long Life Expectancy, Fast/Easy Installation, No Tools required!
Material: Nylon 6/6, NEMA 4, IP 54/65
Conduit: Standard and Super Flex Corrugated Conduit
Fittings: Push-in, Turn-to-Seal, Snapclick-DUO (Double-Sealed Combination Conduit & Cable Strain Relief Fittings, Flange / Bulkhead, Mounting Brackets



Setting Standards

The Cable, Wire & Enclosure Experts!



Solar Plus Enclosures (UV-protected)

Industrial Enclosures

Materials: Polycarbonate, ABS, EMI, Polyester, Polystyrene, Aluminum, Powder-coated Steel, Stainless Steel.
Features: Square/rectangle shape, Solid & transparent lids, PG/Metric Knockouts or Smooth Walls, Flanges, Extension Frames, Hinges & Latches.
Applications: Indoor/Outdoor, Medical, Offshore, Marine, Wi-Fi, Hazardous Areas, Solar, etc.



NEW Solar Enclosures