

**SPECIFICATIONS:**

**Materials:**


Body: Nickel Plated Brass

O-Ring: Buna-N (Optional)

**Operating Temperature:**

-40°F to 212°F (-40°C to 100°C)

Short term 266°F (130°C)

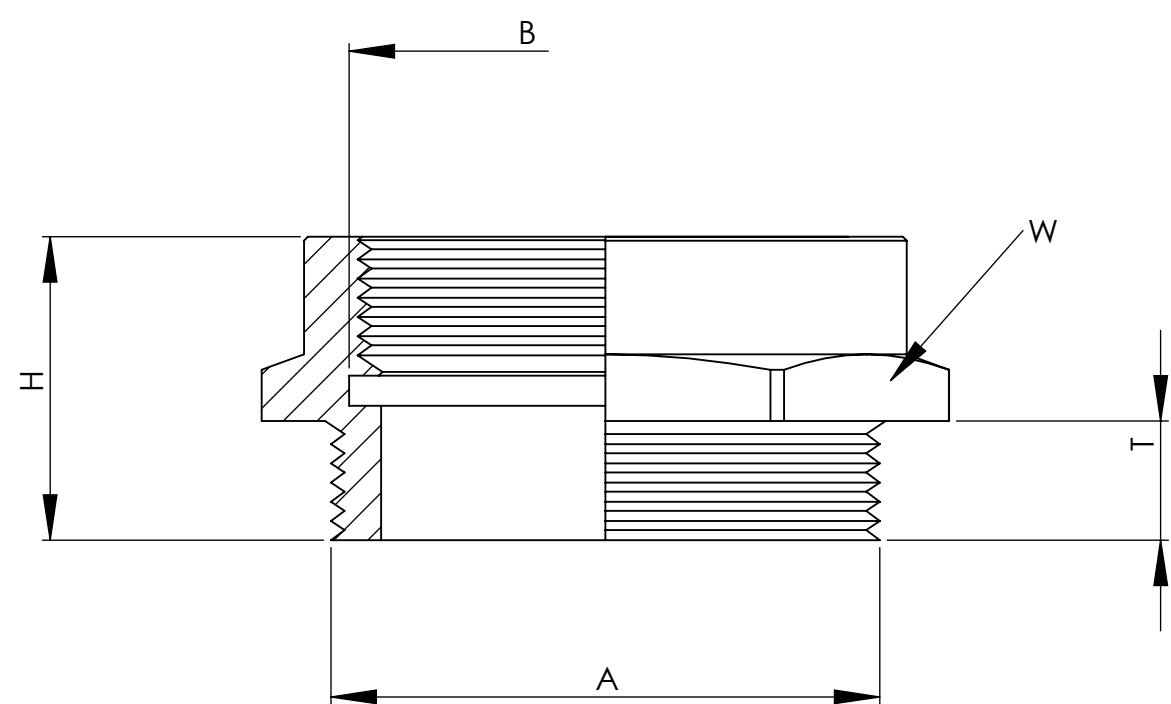


PART NUMBER	MALE THREAD A	FEMALE THREAD B	WRENCHING FLATS W	THREAD LENGTH T	HEIGHT H
AG-0912-AL AG-1112-BR	PG 9 PG 11	1/2" NPT 1/2" NPT	.94 (24) .94 (24)	.25 (6) .24 (6)	.94 (24) .89 (22.7)
AG-1312-BR AG-1612-BR	PG 13.5 PG 16	1/2" NPT 1/2" NPT	.94 (24) .94 (24)	.26 (6.5) .26 (6.5)	.93 (23.5) .91 (23)
AG-2112-BR AG-2134-BR	PG 21 PG 21	1/2" NPT 3/4" NPT	1.18 (30) 1.18 (30)	.27 (7) .27 (7)	.59 (15) .94 (24)
AG-2910-BR	PG 29	1" NPT	1.57 (40)	.31 (8)	.79 (20)

AM-1612-BR AM-2012-BR	M16 x 1.5 M20 x 1.5	1/2" NPT 1/2" NPT	.94 (24) .94 (24)	.24 (6) .24 (6)	.91 (23) .91 (23)
AM-2512-BR AM-2534-BR	M25 x 1.5 M25 x 1.5	1/2" NPT 3/4" NPT	1.18 (30) 1.18 (30)	.27 (7) .27 (7)	.59 (15) 1.02 (26)
AM-3210-BR AM-3254-BR	M32 x 1.5 M32 x 1.5	1" NPT 1-1/4" NPT	1.57 (40) 1.77 (45)	.31 (8) .31 (8)	1.30 (33) 1.30 (33)

**NOTES:**

- 1) GENERAL DIMENSIONS DRAWINGS.
- 2) DIMENSIONS [ ] ARE IN INCHES.
- 3) DIMENSIONS NOTED ARE FOR REFERENCE ONLY.

Third angle projection



7374 S. EAGLE STREET  
CENTENNIAL, CO 80112-4221 USA  
TEL: +1-303-699-1135  
TOLL FREE: +1-800-456-9012  
E MAIL: [info@sealconusa.com](mailto:info@sealconusa.com) ,  
WEBSITE: [www.sealconusa.com](http://www.sealconusa.com)

