

Nylon Liquid Tight Strain Relief Fittings

Multi-Hole - Metric Threads



Nylon Strain Relief



Part Numbers		Thread Type & Size	Dimensions in Inches (mm)			Part Numbers of Inserts Only
-40°F to 212°F (-40°C to 100°C)			No. of Holes	Diameter of Holes		
Black	Gray	See page 56 for thread specs	mm	Inches		
CD12MP-BK	CD12MP-GY		M12 X 1.5	Solid Insert		1.089.0799.19
CD16M1-BK	CD16M1-GY	M16 X 1.5	4	1.4	.06	1.089.0900.19
CD16M2-BK	CD16M2-GY		2	3.0	.12	1.089.0901.19
CD16M3-BK	CD16M3-GY		5	1.6	.06	1.089.0902.19
CD16M4-BK	CD16M4-GY		2	1.7	.07	1.089.0903.19
CD16M5-BK	CD16M5-GY		10	1.4	.06	1.089.0904.19
CD16M6-BK	CD16M6-GY		6	1.4	.06	1.089.0905.19
CD16M7-BK	CD16M7-GY		3	1.7	.07	1.089.0906.19
CD16M8-BK	CD16M8-GY		4	1.7	.07	1.089.0907.19
CD16M9-BK	CD16M9-GY		4	2.3	.09	1.089.0908.19
CD16MP-BK	CD16MP-GY		Solid Insert		1.089.0999.19	
CD17M1-BK	CD17M1-GY	M16 X 1.5 (Enlarged)	2	3.0	.12	1.089.1100.19
CD17M2-BK	CD17M2-GY		3	3.0	.12	1.089.1101.19
CD17M3-BK	CD17M3-GY		2	4.0	.16	1.089.1102.19
CD17M4-BK	CD17M4-GY		3	1.5	.06	1.089.1103.19
CD17M5-BK	CD17M5-GY		4	2.8	.11	1.089.1104.19
CD17MP-BK	CD17MP-GY		Solid Insert		1.089.1199.19	
CD20M1-BK	CD20M1-GY	M20 X 1.5	3	2.0	.08	1.089.1300.19
CD20M2-BK	CD20M2-GY		6	3.0	.12	1.089.1301.19
CD20M3-BK	CD20M3-GY		3	4.0	.16	1.089.1302.19
CD20M4-BK	CD20M4-GY		2	5.0	.20	1.089.1303.19
CD20M5-BK	CD20M5-GY		3	3.0	.12	1.089.1304.19
CD20M6-BK	CD20M6-GY		2	5.2	.20	1.089.1305.19
CD20M7-BK	CD20M7-GY		2	3.8	.15	1.089.1306.19
CD20M8-BK	CD20M8-GY		2	4.2	.17	1.089.1307.19
CD20M9-BK	CD20M9-GY		2	2.5	.10	1.089.1308.19
CD20MP-BK	CD20MP-GY		Solid Insert		1.089.1399.19	
CD22M1-BK	CD22M1-GY	M20 X 1.5 (Enlarged)	3	3.0	.12	1.089.1600.19
CD22M2-BK	CD22M2-GY		3	4.0	.16	1.089.1601.19
CD22M3-BK	CD22M3-GY		4	4.0	.16	1.089.1602.19
CD22M4-BK	CD22M4-GY		5	4.0	.16	1.089.1603.19
CD22M5-BK	CD22M5-GY		6	4.0	.16	1.089.1604.19
CD22M6-BK	CD22M6-GY		2	6.0	.24	1.089.1605.19
CD22M7-BK	CD22M7-GY		3	5.6	.22	1.089.1606.19
CD22M8-BK	CD22M8-GY		6	3.0	.12	1.089.1607.19
CD22M9-BK	CD22M9-GY		*4	3.0	.12	*1.089.1610.19
CD22M0-BK	CD22M0-GY		6	3.8	.15	1.089.1909.19
CD22MP-BK	CD22MP-GY	Solid Insert		1.089.1699.19		

*Note: This Insert has slotted holes.

*Note: UL f1 (746C) rating applies to Black Nylon Fittings only.

Fittings with Multi-Hole Inserts are also available with a Flex Nut.

To order, substitute "CF" for "CD" (e.g. CD16M1-BK becomes CF16M1-BK).

"BP" (Billet Plugs) available upon request.

Custom Solutions for terminated cable!

For Strain Relief Specifications and Dimensions refer to page 5.


For Material Specifications and Approval Information refer to page 52.

Part Numbers		Thread Type & Size	Dimensions in Inches (mm)			Part Numbers of Inserts Only
-40°F to 212°F (-40°C to 100°C)			No. of Holes	Diameter of Holes		
Black	Gray	See page 56 for thread specs	mm	Inches		
CD25M1-BK	CD25M1-GY		M25 X 1.5	4		6.0
CD25M2-BK	CD25M2-GY	3		7.0	.28	1.089.2101.19
CD25M3-BK	CD25M3-GY	2		8.0	.31	1.089.2102.19
CD25M4-BK	CD25M4-GY	4		5.0	.20	1.089.2103.19
CD25M5-BK	CD25M5-GY	1		8.0	.31	1.089.2104.19
CD25M6-BK	CD25M6-GY	4		5.2	.20	1.089.2105.19
CD25M7-BK	CD25M7-GY	3		5.2	.20	1.089.2106.19
CD25M8-BK	CD25M8-GY	4/1		5.2/3.7	.20/.15	1.089.2107.19
CD25M9-BK	CD25M9-GY	2		7.4	.29	1.089.2108.19
CD25MP-BK	CD25MP-GY	Solid Insert		1.089.2199.19		
CD32M1-BK	CD32M1-GY	M32 X 1.5	6	6.5	.26	1.089.2900.19
CD32M2-BK	CD32M2-GY		4	9.0	.35	1.089.2901.19
CD32M3-BK	CD32M3-GY		4	9.5	.37	1.089.2902.19
CD32MP-BK	CD32MP-GY		Solid Insert		1.089.2999.19	
CD40M1-BK	CD40M1-GY	M40 X 1.5	5	9.0	.35	1.089.3600.19
CD40M2-BK	CD40M2-GY		7	9.0	.35	1.089.3601.19
CD40M3-BK	CD40M3-GY		6	8.0	.31	1.089.3602.19
CD40M4-BK	CD40M4-GY		2	15.0	.59	1.089.3603.19
CD40MP-BK	CD40MP-GY		Solid Insert		1.089.3699.19	
CD50M1-BK	CD50M1-GY	M50 X 1.5	3	14.0	.55	1.089.4203.19
CD50MP-BK	CD50MP-GY		Solid Insert		1.089.4299.19	
CD63M1-BK	CD63M1-GY	M63 X 1.5	8	10.0	.39	1.089.4800.19
CD63M2-BK	CD63M2-GY		6	12.0	.47	1.089.4801.19
CD63M3-BK	CD63M3-GY		3	18.0	.71	1.089.4802.19
CD63MP-BK	CD63MP-GY		Solid Insert		1.089.4899.19	

RJ45 Solution

Part Numbers		Thread Type & Size	Dimensions in Inches (mm)		Part Numbers of Inserts Only
-40°F to 212°F (-40°C to 100°C)			Cable Diameter		
Black	Gray	See page 56 for thread specs	mm	Inches	
CD22MK-BK	CD22MK-GY		M20	5.7	
CD22MJ-BK	CD22MJ-GY	(Enlarged)	6.9	.27	1.089.16C-07

*Note: RJ45 Solution has no approval ratings. Reference Diagram below.

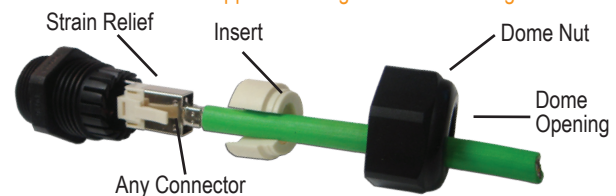

Dome Fittings also available with the following approvals:



www.SealconEX.com



Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.