


Dome Plugs: Nylon (No O-Ring Groove) - IP 54						
Part Numbers		Thread Type & Size	Dimensions Inches (mm)			
-40°F to 212°F (-40°C to 100°C)			H	D	TL	
		See page 56 for thread specs	Overall Height	Outer Diameter	Thread Length	
DP-07-BK	DP-07-GY		PG 7	.31 (8)	.59 (15)	.24 (6)
DP-09-BK	DP-09-GY		PG 9	.35 (9)	.75 (19)	.24 (6)
DP-11-BK	DP-11-GY		PG 11	.35 (9)	.87 (22)	.24 (6)
DP-13-BK	DP-13-GY		PG 13 / 13.5	.37 (9.5)	.98 (25)	.24 (6)
DP-16-BK	DP-16-GY		PG 16	.37 (9.5)	1.06 (27)	.24 (6)
DP-21-BK	DP-21-GY		PG 21	.43 (11)	1.30 (33)	.31 (8)
DP-29-BK	DP-29-GY		PG 29	.47 (12)	1.73 (44)	.31 (8)
DP-36-BK	DP-36-GY		PG 36	.59 (15)	2.17 (55)	.39 (10)
DP-42-BK	DP-42-GY		PG 42	.63 (16)	2.44 (62)	.39 (10)
DP-48-BK	DP-48-GY		PG 48	.63 (16)	2.72 (69)	.47 (12)
DM-12-BK	DM-12-GY		M12 x 1.5	.39 (10)	.59 (15)	.24 (6)
DM-16-BK	DM-16-GY		M16 x 1.5	.45 (11.5)	.79 (20)	.28 (7)
DM-20-BK	DM-20-GY		M20 x 1.5	.37 (9.5)	.98 (25)	.24 (6)
DM-25-BK	DM-25-GY		M25 x 1.5	.61 (15.5)	1.18 (30)	.43 (11)
DM-32-BK	DM-32-GY	M32 x 1.5	.63 (16)	1.50 (38)	.43 (11)	
DM-40-BK	DM-40-GY	M40 x 1.5	.71 (18)	1.81 (46)	.51 (13)	
DM-50-BK	DM-50-GY	M50 x 1.5	.73 (18.5)	2.20 (56)	.51 (13)	
DM-63-BK	DM-63-GY	M63 x 1.5	.75 (19)	2.72 (69)	.59 (15)	

Hex Plugs: Nylon					
Part Numbers		Thread Type & Size	Dimensions Inches (mm)		
-4°F to 176°F (-20°C to 80°C)			B	D	TL
		See page 56 for thread specs	Body Length	Wrench Flat	Thread Length
HP-07-BK	PG 7 / 1/4" NPT		.51 (13)	.59 (15)	.33 (8.5)
HP-09-BK	PG 9		.51 (13)	.75 (19)	.33 (8.5)
HP-11-BK	PG 11		.57 (14.5)	.94 (24)	.35 (9)
HP-13-BK	PG 13 / 13.5		.57 (14.5)	.94 (24)	.35 (9)
HP-16-BK	PG 16		.63 (16)	1.10 (28)	.41 (10.5)
HP-21-BK	PG 21		.69 (17.5)	1.42 (36)	.45 (11.5)
HP-29-BK	PG 29		.71 (18)	1.81 (46)	.45 (11.5)
HP-36-BK	PG 36		.79 (20)	2.17 (55)	.53 (13.5)
HP-42-BK	PG 42		.79 (20)	2.36 (60)	.53 (13.5)
HP-48-BK	PG 48		.83 (21)	2.76 (70)	.57 (14.5)
HM-12-BK	M12 x 1.5		.51 (13)	.59 (15)	.33 (8.5)
HM-16-BK	M16 x 1.5		.51 (13)	.75 (19)	.33 (8.5)
HM-20-BK	M20 x 1.5		.57 (14.5)	.94 (24)	.35 (9)
HM-25-BK	M25 x 1.5		.63 (16)	1.10 (28)	.41 (10.5)
HM-32-BK	M32 x 1.5	.69 (17.5)	1.42 (36)	.45 (11.5)	
HM-40-BK	M40 x 1.5	.71 (18)	1.81 (46)	.45 (11.5)	
HM-50-BK	M50 x 1.5	.79 (20)	2.17 (55)	.53 (13.5)	
HM-63-BK	M63 x 1.5	.83 (21)	2.76 (70)	.57 (14.5)	

*Available with an O-Ring Groove

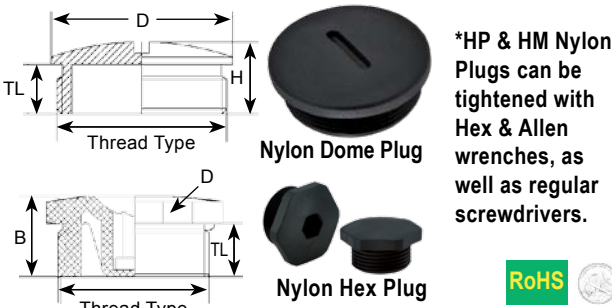

*HP & HM Nylon Plugs can be tightened with Hex & Allen wrenches, as well as regular screwdrivers.



Hex Plugs also available with the following approvals:



www.SealconEX.com

*German Lloyd Approval only applies to Nylon Hex Plugs with PG or Metric Threads.

Part Numbers		Thread Type & Size	Dimensions in Inches (mm)						
-40 °F to 176 °F (-40 °C to 80 °C)			H	D	TL	H	D	TL	
		See page 56 for thread specs	Overall Height	Outer Diameter	Thread Length	Overall Height w/ O-Ring	Outer Diameter w/ O-Ring	Thread Length w/ O-Ring	
DM-12-BR	DM-12-BR-B		M12 x 1.5	.30 (7.5)	.55 (14)	.20 (5)	.37 (9.5)	.55 (14)	.26 (6.5)
DM-16-BR	DM-16-BR-B		M16 x 1.5	.35 (9)	.71 (18)	.20 (5)	.35 (9)	.79 (20)	.24 (6)
DM-20-BR	DM-20-BR-B		M20 x 1.5	.37 (9.5)	.87 (22)	.26 (6.5)	.37 (9.5)	.94 (24)	.26 (6.5)
DM-25-BR	DM-25-BR-B		M25 x 1.5	.43 (11)	1.10 (28)	.28 (7)	.43 (11)	1.10 (28)	.28 (7)
DM-32-BR	DM-32-BR-B		M32 x 1.5	.47 (12)	1.38 (35)	.31 (8)	.49 (12.5)	1.38 (35)	.31 (8)
DM-40-BR	DM-40-BR-B		M40 x 1.5	.51 (13)	1.73 (44)	.33 (8.5)	.47 (12)	1.77 (45)	.31 (8)
DM-50-BR	DM-50-BR-B		M50 x 1.5	.59 (15)	2.13 (54)	.35 (9)	.59 (15)	2.17 (55)	.35 (9)
DM-63-BR	DM-63-BR-B		M63 x 1.5	.63 (16)	2.64 (67)	.39 (10)	.63 (16)	2.68 (68)	.39 (10)

Dome Plugs: Nickel Plated Brass

Dome Plugs: Nickel Plated Brass							
Part Numbers		Thread Type & Size	Dimensions Inches (mm)				
-40°F to 176°F (-40°C to 80°C)			H	TL	D	TL	
		See page 56 for thread specs	Overall Height	Thread Length	Outer Diameter	Thread Length w/ O-Ring	
DP-07-BR	DP-07-BR-B		PG 7	.31 (8)	.20 (5)	.55 (14)	.19 (4.8)
DP-09-BR	DP-09-BR-B		PG 9	.35 (9)	.24 (6)	.67 (17)	.22 (5.5)
DP-11-BR	DP-11-BR-B		PG 11	.35 (9)	.24 (6)	.79 (20)	.22 (5.5)
DP-13-BR	DP-13-BR-B		PG 13 / 13.5	.37 (9.5)	.26 (6.5)	.87 (22)	.24 (6)
DP-16-BR	DP-16-BR-B		PG 16	.37 (9.5)	.26 (6.5)	.94 (24)	.24 (6)
DP-21-BR	DP-21-BR-B		PG 21	.43 (11)	.28 (7)	1.18 (30)	.26 (6.5)
DP-29-BR	DP-29-BR-B		PG 29	.47 (12)	.31 (8)	1.54 (39)	.30 (7.5)
DP-36-BR	DP-36-BR-B		PG 36	.59 (15)	.35 (9)	1.97 (50)	.35 (9)
DP-42-BR	DP-42-BR-B		PG 42	.63 (16)	.39 (10)	2.24 (57)	.39 (10)
DP-48-BR	DP-48-BR-B		PG 48	.63 (16)	.39 (10)	2.52 (64)	.39 (10)

To order a hole plug with an FKM O-Ring instead of Buna-N, replace "-V" (FKM) to part number (e.g. DP-11-BR-V).



Hex Plugs: Polypropylene					
Part Numbers		Thread Type & Size	Dimensions Inches (mm)		
32°F to 275°F (0°C to 135°C)			B	D	TL
		See page 56 for thread specs	Overall Height	Wrench Flat	Thread Length
HN-38-BK	3/8" NPT		.83 (21)	.75 (19)	.59 (15)
HN-12-BK	1/2" NPT		.81 (20.5)	.94 (24)	.55 (14)
HN-34-BK	3/4" NPT		.87 (22)	1.10 (28)	.63 (16)
HN-10-BK	1" NPT		.91 (23)	1.34 (34)	.67 (17)

For Material Specifications and Approval Information refer to page 52. O-Ring needed for Type Nema 4x