


M23 POWER, M23 HYBRID CONNECTORS

HOUSINGS

M23 Power Panel Connector w/ Strain Relief, EMI, Single Hole, Male Thread Standard Threaded and TWILOCK/TWILOCK-S* - Quick Connect

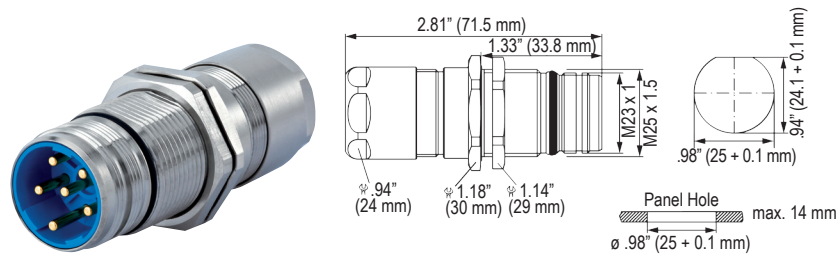

Cable-Ø	Part Number
Rear Mounting, Single Hole, Thread M25 x 1.5, 7 - 12 mm (.27 - .47").....	S7.653.500.000
11 - 17 mm (.43 - .67").....	S7.653.600.000
*Intermateable with SpeedTEC® (TwiLock-S)	
7 - 12 mm (.24 - .47").....	S7.653.500.00S
11 - 17 mm (.43 - .67").....	S7.653.600.00S
Including Hex Locking Nut M25 x 1.5	

M23 Power Right Angle Connector, EMI, Female Thread, Rotatable




Cable-Ø	Part Number
7 - 12 mm (.27 - .47").....	S7.576.500.000
11 - 17 mm (.43 - .67").....	S7.576.600.000

M23 Power Right Angle Connector, EMI, Male Thread, Rotatable




Cable-Ø	Part Number
7 - 12 mm (.27 - .47").....	S7.580.500.000
10 - 14 mm (.39 - .55").....	S7.580.600.000

M23 Power Panel Connectors, Male Thread, Flange Standard Threaded and TWILOCK/TWILOCK-S* - Quick Connect

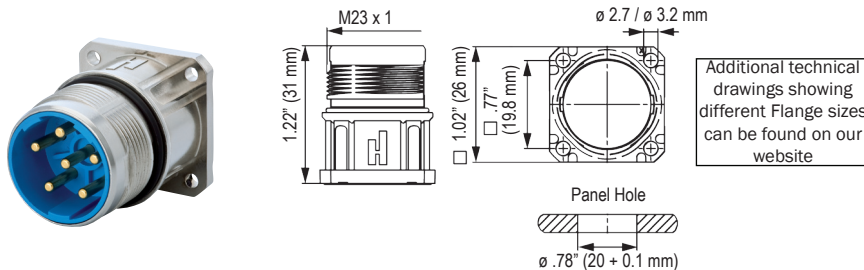

Type	Part Number
Front Mounting, Flange 26 x 26 mm	
4 x Holes Ø 3.2 mm.....	S7.601.000.000
4 x Holes Ø 2.7 mm.....	S7.605.000.000
*Intermateable with SpeedTEC® (TwiLock-S)	
4 x Holes 3.2 mm, Flange 25 x 25.....	S7.601.000.00S
4 x Holes 3.2 mm, Flange 28 x 28.....	S7.601.100.00S

M23 Power Panel Connector with Knurled Nut, Female Thread, Flange

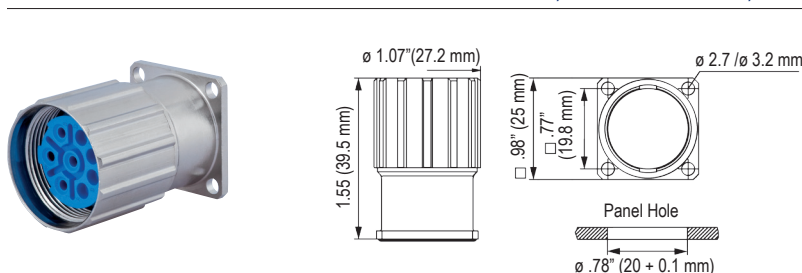

Type	Part Number
Front Mounting, Flange 25 x 25 mm	
4 x Holes Ø 3.2 mm.....	S7.641.000.000
Optional: Flat gasket....STAD2-7P2510	
4 x Holes Ø 2.7 mm.....	S7.645.000.000
Optional: Flat gasket....STAD1-7P2510	

MATES WITH TWILOCK SYSTEM

DOES NOT MATE WITH TWILOCK SYSTEM