


M40 POWER CONNECTORS

HOUSINGS

M40 Power Straight Connector, EMI, Male Thread Standard Threaded and TWILOCK-S - Quick Connect


INSERTS INCLUDED, CONTACTS ORDERED SEPARATELY

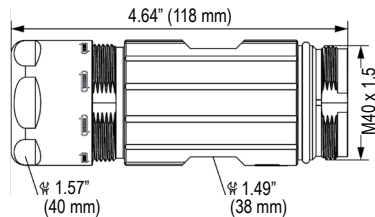

Cable-Ø	Part Number
13 - 18 mm (.51 - .71")	S7.720.623.000
17 - 24 mm (.67 - .97")	S7.720.723.000
21 - 28 mm (.83 - 1.10")	S7.720.823.000

Intermateable with SpeedTEC® (Twilock-S)


13 - 18 mm (.51 - .71")	S7.720.623.00S
17 - 24 mm (.67 - .97")	S7.720.723.00S
21 - 28 mm (.83 - 1.10")	S7.720.823.00S



6 Positions
2 + 3 + PE, Insert for Pins

M40 Power Straight Connector, EMI, Male Thread Standard Threaded and TWILOCK-S - Quick Connect


INSERTS INCLUDED, CONTACTS ORDERED SEPARATELY

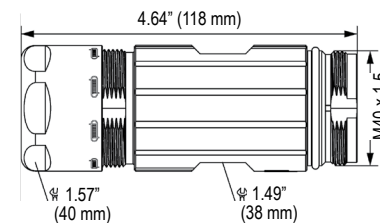

Cable-Ø	Part Number
13 - 18 mm (.51 - .71")	S7.720.643.000
17 - 24 mm (.67 - .97")	S7.720.743.000
21 - 28 mm (.83 - 1.10")	S7.720.843.000

Intermateable with SpeedTEC® (Twilock-S)


13 - 18 mm (.51 - .71")	S7.720.643.00S
17 - 24 mm (.67 - .97")	S7.720.743.00S
21 - 28 mm (.83 - 1.10")	S7.720.843.00S



8 Positions
4 + 3 + PE, Insert for Pins

M40 Power Panel Connector, Male Thread, Flange Standard Threaded and TWILOCK-S - Quick Connect


INSERTS INCLUDED, CONTACTS ORDERED SEPARATELY

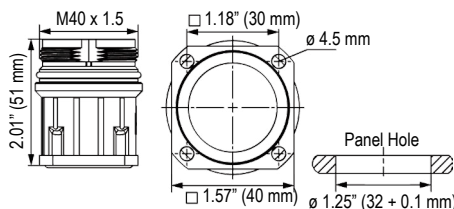

Type	Part Number
Front Mounting, Flange 40 x 40 mm 4 x Holes Ø 4.5 mm	S7.740.023.000

Intermateable with SpeedTEC® (Twilock-S)


4 x Holes Ø 4.5 mm	S7.740.023.00S
--------------------	----------------



6 Positions
2 + 3 + PE, Insert for Pins

M40 Power Panel Connector, Male Thread, Flange Standard Threaded and TWILOCK-S - Quick Connect


INSERTS INCLUDED, CONTACTS ORDERED SEPARATELY

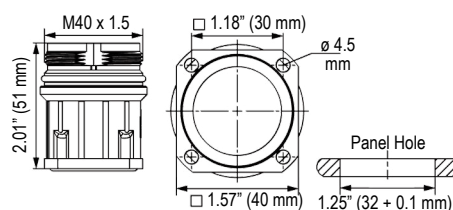

Type	Part Number
Front Mounting, Flange 40 x 40 mm 4 x Holes Ø 4.5 mm	S7.740.043.000

Intermateable with SpeedTEC® (Twilock-S)

4 x Holes Ø 4.5 mm	S7.740.043.00S
--------------------	----------------



8 Positions
4 + 3 + PE, Insert for Pins