


For Non-Armored Braided Cable

Nickel Plated Brass, Cable Glands EMI/RFI Proof for Braided Cables for Hazardous Duty Locations, Low Temperatures, Nylon/PVDF Spline with Buna-N & FPM Inserts, V0, UL94, NEMA 6, 150 PSIG, IP 68/69K, 10 BAR


Part Numbers			Cable Range	Thread Type & Size	Dimensions in Inches (mm)			
-4°F to 203°F (-20°C to 95°C)	-76°F to 203°F (-60°C to 95°C)	-4°F to 266°F (-20°C to 130°C)			A	B	C	F ₁ /F
			Inches (mm)	Page 59 for Thread Specs	Clearance Hole	Body Length	Thread Length	Wrench Flats
					+ .01" (+.25 mm)	(Dome)		
CD09NA-EX	CC09NA-EX	CD09NA-EX-V	.16 - .31 (4 - 8)	3/8" NPT	.68 (17.2)	.83 (21)	.59 (15)	.67 (17) / .75 (19)
CD09NR-EX	CC09NR-EX	CD09NR-EX-V	.08 - .24 (2 - 6)					
CD13NA-EX	CC13NA-EX	CD13NA-EX-V	.24 - .47 (6 - 12)	1/2" NPT	.83 (21.1)	.94 (24)	.51 (13)	.87 (22) / .94 (24)
CD13NR-EX	CC13NR-EX	CD13NR-EX-V	.20 - .35 (5 - 9)					
CD21NA-EX	CC21NA-EX	CD21NA-EX-V	.55 - .71 (14 - 18)	3/4" NPT	1.05 (26.7)	.98 (25)	.51 (13)	1.18 (30)
CD21NR-EX	CC21NR-EX	CD21NR-EX-V	.39 - .63 (10 - 16)					
CD12MA-EX	CC12MA-EX	-	.12 - .26 (3 - 6.5)	M12 x 1.5	.47 (12)	.75 (19)	.26 (6.5)	.55 (14)
CD12MR-EX	CC12MR-EX	-	.08 - .20 (2 - 5)	M16 x 1.5	.63 (16)	.87 (22)	.24 (6)	.79 (20)
CD17MA-EX	CC17MA-EX	-	.24 - .39 (6 - 10)					
CD17MR-EX	CC17MR-EX	-	.12 - .27 (3 - 7)	M20 x 1.5	.79 (20)	.91 (23)	.24 (6)	.94 (24)
CD22MA-EX	CC22MA-EX	-	.39 - .55 (10 - 14)					
CD22MR-EX	CC22MR-EX	-	.27 - .47 (7 - 12)	M25 x 1.5	.98 (25)	.94 (24)	.28 (7)	1.18 (30)
CD25MA-EX	CC25MA-EX	-	.55 - .71 (14 - 18)					
CD25MR-EX	CC25MR-EX	-	.39 - .63 (10 - 16)	M32 x 1.5	1.26 (32)	1.22 (31)	.31 (8)	1.57 (40)
CD32MA-EX	CC32MA-EX	-	.79 - .98 (20 - 25)					
CD32MR-EX	CC32MR-EX	-	.51 - .79 (13 - 20)	M40 x 1.5	1.57 (40)	1.46 (37)	.31 (8)	1.97 (50)
CD40MA-EX	CC40MA-EX	-	.87 - 1.26 (22 - 32)					
CD40MR-EX	CC40MR-EX	-	.79 - 1.02 (20 - 26)	M50 x 1.5	1.97 (50)	1.46 (37)	.35 (9)	2.24 (57)
CD50MA-EX	CC50MA-EX	-	1.26 - 1.50 (32 - 38)					
CD50MR-EX	CC50MR-EX	-	.98 - 1.22 (25 - 31)	M63 x 1.5	2.48 (63)	1.50 (38)	.39 (10)	2.52 (64) / 2.68 (68)
CD63MA-EX	CC63MA-EX	-	1.46 - 1.73 (37 - 44)					
CD63MR-EX	CC63MR-EX	-	1.14 - 1.38 (29 - 35)					

*CE apply to all "-EX" style cable glands.

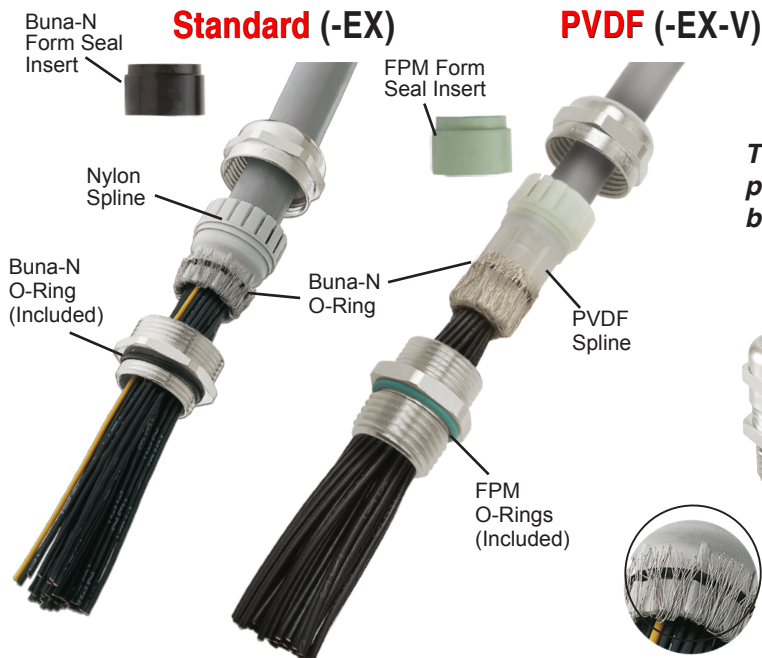

Elongated Threads are also available in Metric Stainless Steel

The Standard version has an integral O-ring, which presses the braiding against the inside wall of the body. Can only be used with braided shield.



Patented 360° grounding due to the internal O-Ring, ensures perfect contact between braided shield of cable and fitting.

Ex-d EXIOS Cable Glands
Ex-e Nickel Plated Brass & Stainless Steel Glands
Nylon Glands
Ex-e Multi-Hole & Romex Glands
Ex-e Nickel Plated Brass & Stainless Steel Glands
Ex-e EMI / RFI Nickel Plated Brass Glands
Ex-e / Ex-d Accessories
Technical Information