Conformity									
Polycarbonate Enclosures:	🤆 RŎHS 🖲 🕲 🌉 MADEIN								
Technical information									
Instrumented Dart Impact @ 73° F	Inch / Pound 565								
Falling Ball Impact @ 73° F	UL-746 Inch / Pound 900								
Deflection Temperature @ 264 psi	ASTM D648 Degrees F 270								
Modulus of Elasticity	rn ASTM D790 ksi 340								
Temperature Range	Degrees F -40 to 265								
Flame Rating - UL	UL 94 - 5VA								
Outdoor UV Exposure	UL - f1								
UL/C-UL-50 listed	(File # E207562)								
Material									
Base:	: Polycarbonate Enclosure								
Cover:	Polycarbonate Hinged Cover								
Cover Screws:	Fiberglass Reinforced Polyamide								
Enclosure side types									
Polycarbonate enclosures:									
Standard color									
Base:	Light Gray in Color With High Gloss Finish								
Cover:	Opaque or Clear								



# Sealcon 20 X 16 X 8 INCH Enclosure

S201608 P/N	4X IP66	6P IP68	Hinged Cover	Opaque Cover	Clear Cover	Integrated Mounting Flange	Non-Metallic Locking Latch	Multi-Max Rail System	3-Point Latch	1/4 Turn Latch
SG201608	~	~	~	~		~	~	~		
SG201608C	~	~	~		~	~	~	~		
SG201608TPL	~		~	~		~		~	~	
SG201608CTPL	~		~		~	~		~	~	
SG201608QTL	~		~	~		~		~		~
SG201608CQTL	~		~		~	~		~		~
SG201608E	~	~	~	~		~	~			
SG201608CE	~	~	~		~	~	~			



Part numbers containing -E exclude Multi-Max Frame and Multi-Max Rail System

### SG201608 Includes The Following

Enclosure, Multi-Max Frame, Set of Four Multi-Max Rails (with Screws), and Two Latches









#### Brass inserts on rear wall of enclosure and on lid for more mounting options

• Sturdy, full length piano hinged door

SIZE 20 X 16 X 8 INCH

Made in the USA

Multi-Max frame

• Integrated mounting flanges eliminate the need to affix to the enclosure

POLYCARBONATE ENCLOSURE

 Featuring Sealcon's unique "Multi-Max Rail Mounting System" (an extremely flexible interior mounting system)

· Extra rigid construction utilizing unique internal

20 x 16 x 8 Inch Enclosure in Brief:

• Light gray in color with high gloss finish

• Available in multiple closure options: non-metallic, quarter turn or three-point latch configurations

# **Contents of Product Package:**

- Enclosure
- Multi-Max Frame
- Set of Four Multi-Max Rails (with Screws)
- Two Latches

### SG201608QTL






SG201608CF



G201608TPL

www.SealconUSA.com | (303) 699-1135 | (800) 456-9012 Dimensions & Specifications may be changed without prior notice



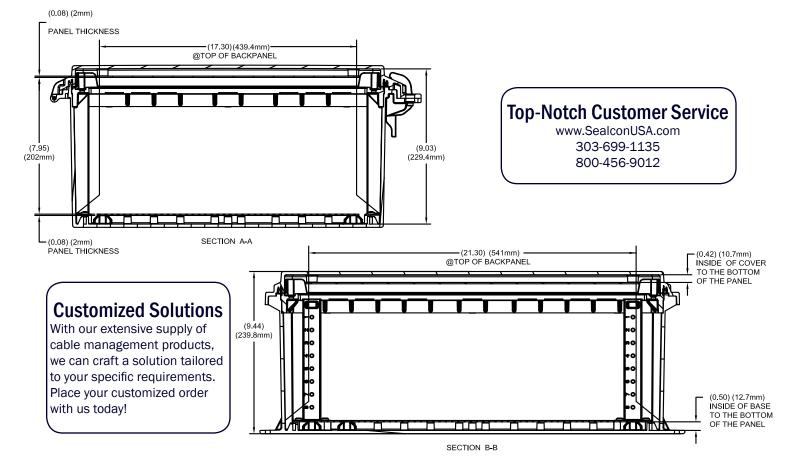

Accessories for 20x16x8 Inch

Enclosure, Multi-Max Frame, Set of Four Multi-Max Rails (with Screws), and Two Latches



Multi-Max Rails SKIT-GMMR8 -Four Multi-Max Rails with screws included



Panel Pads SKIT-GPP-2016 Includes four panel pads and screws



Pole Mounting Kits SPMKG-216-GEN - 2" pole SPMKG-316-GEN - 3" pole SPMKG-416-GEN - 4" pole

SPMKG-1216-GEN - 12" pole



Door Stop Kit SKIT-DOOR-STOP -Door Stop Kit for 20 Inch Enclosures



Self-Tapping Screws SGSP-10 - Selftapping screws for bosses (10 per pack)



SSBP2016 and SGSOPK20 SGSOPK20 - 20" hinge, panel pads and screws (panel not included)


Multi-Max Frame SGSR2016 - Multi-Max frame support ring




Back and Swing Panels SABP-2016 - Aluminum panel SSBP-2016 -Steel panel SPVCBP-2016 - PVC panel



Fan Shroud Kits SFS-KIT-1 - One shroud with gasket and screws SFS-KIT-2 - Two shrouds with gasket and screws





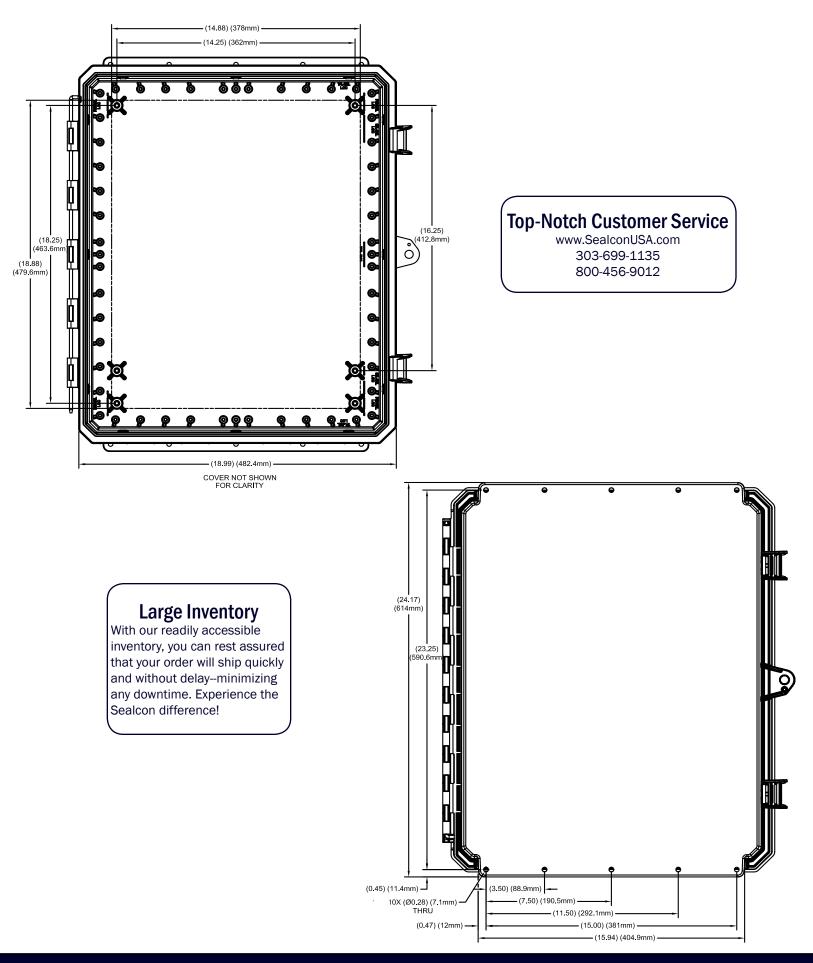

www.SealconUSA.com | (303) 699-1135 | (800) 456-9012 Dimensions & Specifications may be changed without prior notice

