Conformity	
Polycarbonate Enclosures:	
Technical information	
Instrumented Dart Impact @ 73° F	Inch / Pound 565
Falling Ball Impact @ 73° F	UL-746 Inch / Pound 900
Deflection Temperature @ 264 psi	ASTM D648 Degrees F 270
Modulus of Elasticity	rn ASTM D790 ksi 340
Temperature Range	Degrees F -40 to 265
Flame Rating - UL	UL 94 - 5VA
Outdoor UV Exposure	UL - f1
UL/C-UL-50 listed	(File # E207562)
Material	
Base:	Polycarbonate Enclosure
Cover:	Polycarbonate Hinged Cover
Cover Screws:	Fiberglass Reinforced Polyamide
Enclosure side types	
Polycarbonate enclosures:	
Standard color	
Base:	Light Gray in Color With High Gloss Finish
Cover:	Opaque or Clear

POLYCARBONATE ENCLOSURE

SIZE 24 X 24 X 10 INCH

24 x 24 x 10 Inch Enclosure in Brief:

- Made in the USA
- Light gray in color with high gloss finish
- Featuring Sealcon's unique "Multi-Max Rail Mounting System" (an extremely flexible interior mounting system)
- Sturdy, full length piano hinged door
- Extra rigid construction utilizing unique internal Multi-Max frame
- Brass inserts on rear wall of enclosure and on lid for more mounting options
- Integrated mounting flanges eliminate the need to affix to the enclosure
- Available in multiple closure options: non-metallic, quarter turn or three-point latch configurations

Contents of Product Package:

- Enclosure
- Multi-Max Frame
- Set of Four Multi-Max Rails (with Screws)
- Four Latches

SG242410







Sealcon 24 x 24 x 10 INCH Enclosure

S242410 P/N	4X IP66	6P IP68	Hinged Cover	Opaque Cover	Clear Cover	Integrated Mounting Flange	Non-Metallic Locking Latch	Multi-Max Rail System	3-Point Latch	1/4 Turn Latch
SG242410	~	~	~	~		~	~	~		
SG242410C	~	~	~		~	~	~	~		
SG242410TPL	~		~	>		~		~	~	
SG242410CTPL	~		~		~	~		~	~	
SG242410QTL	~		~	>		~		~		~
SG242410CQTL	~		~		~	~		~		~
SG242410E	~	~	~	~		~	~			
SG242410CE	~	~	~		~	~	~			




Part numbers containing -E exclude Multi-Max Frame and Multi-Max Rail System


SG201608 Includes The Following

Enclosure, Multi-Max Frame, Set of Two Multi-Max Rails (with Screws), and Four Latches











www.SealconUSA.com | (303) 699-1135 | (800) 456-9012 Dimensions & Specifications may be changed without prior notice



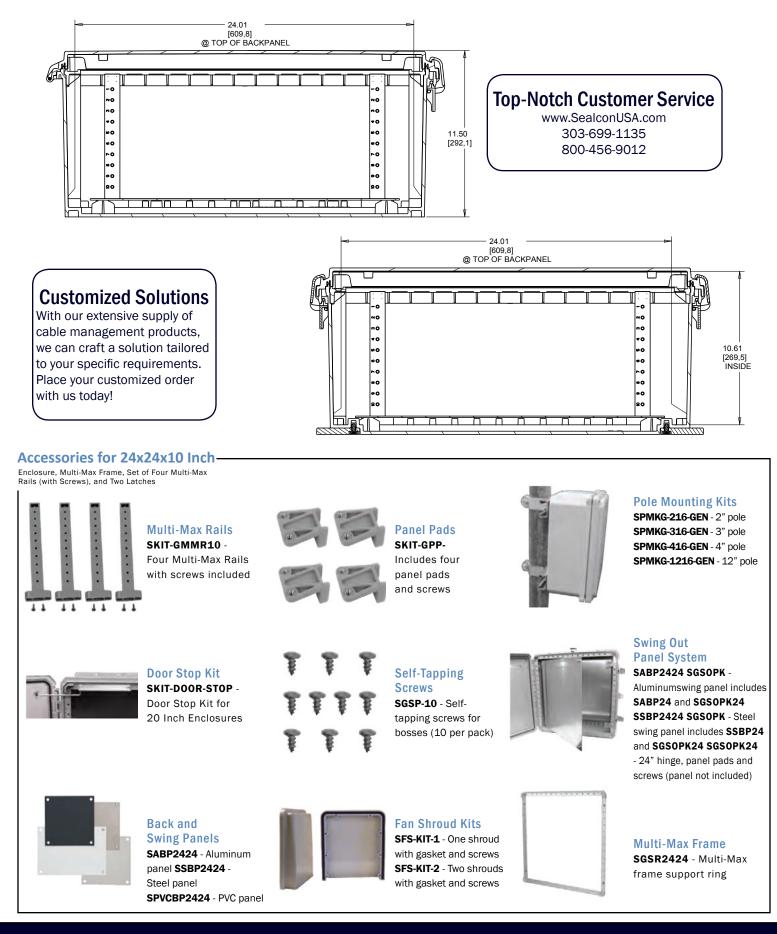

www.SealconUSA.com | (303) 699-1135 | (800) 456-9012 Dimensions & Specifications may be changed without prior notice



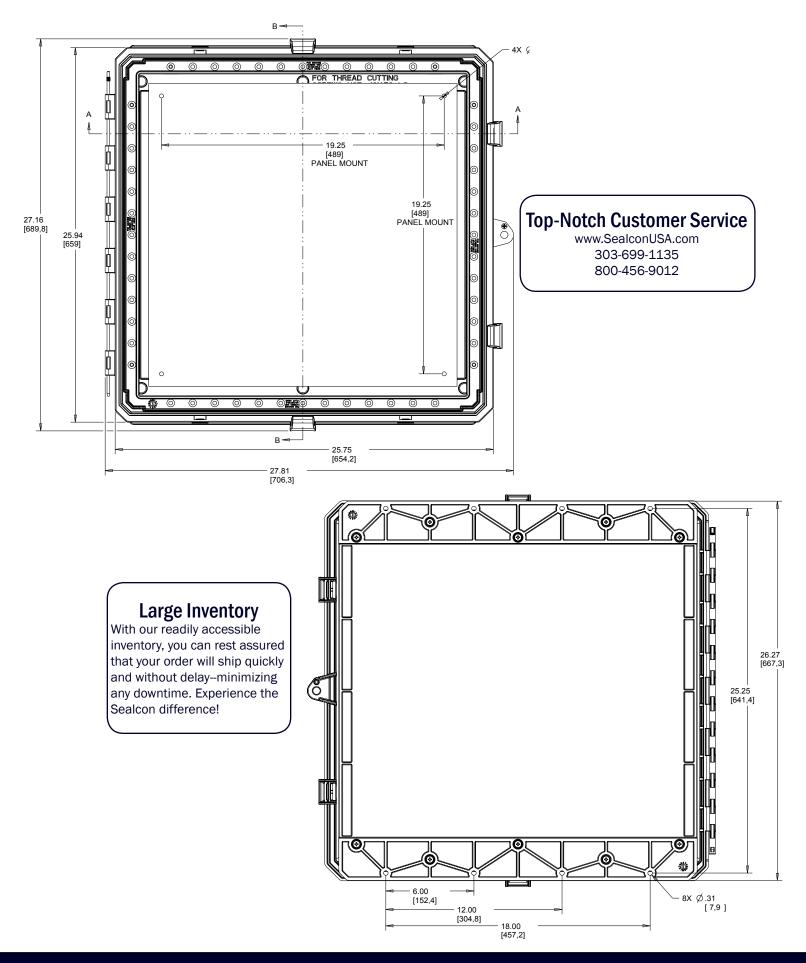

www.SealconUSA.com | (303) 699-1135 | (800) 456-9012 Dimensions & Specifications may be changed without prior notice

