


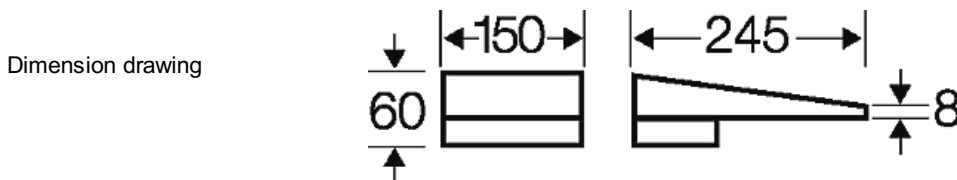
Empty boxes

	<p>Mi DB 15</p> <ul style="list-style-type: none"> • Canopy • for box wall 150 mm
---	--

- with fixing wedges and seal
- suitable for outdoor installation, UV resistant

material	stainless steel powder-coated
weight	1,011 kg

Drawings



Operating and ambient conditions

Application area	Suitable for outdoor installation (harsh environment and/or outdoor). However, pay attention to the climatic effects on the installed equipment, for example, high or low ambient temperatures or formation of condensed water see technical information
Resistant to occasional cleaning procedures (direct jet)	Resistance to occasional cleaning procedures (direct jet) with high-pressure cleaner without cleaning additives, water pressure: max 100 bar, water temperature: Max. 80° C, distance => 0.15 m, in accordance with IP 69 requirements, single enclosure without lid equipment (no enclosure assembly), enclosure and cable glands at least IP 65.
Relative humidity	50% at 40° C short-time 100% at 25° C
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2