

## Main line branch terminals



### DK 5035 S


- 6-35 mm<sup>2</sup>, Cu



- with main line branch terminals for copper conductors
- 5-pole per pole incoming terminals 16-35 mm<sup>2</sup> r, 10-25 mm<sup>2</sup> f, with end ferrule, outgoing cables 10-25 mm<sup>2</sup> r, 6-16 mm<sup>2</sup> f with end ferrule
- lid fasteners sealable without accessories
- cable entries via knockouts, order AKM separately (see cable entry systems LES)
- with two cable entries M 32 from the rear side
- external brackets for wall fixing included
- colour: grey, RAL 7035

rated insulation voltage	U <sub>i</sub> = 400 V a.c.
rated current:	100 A
material	PC (Polycarbonate)
degree of protection	IP 66
width	355 mm
height	255 mm
depth	122 mm
weight	2,172 kg
tightening torque for terminal	4,0 Nm Zuleitungsklemmen 3,0 Nm Ableitungsklemmen
VNB approval	Vattenfall-Berlin

## Drawings

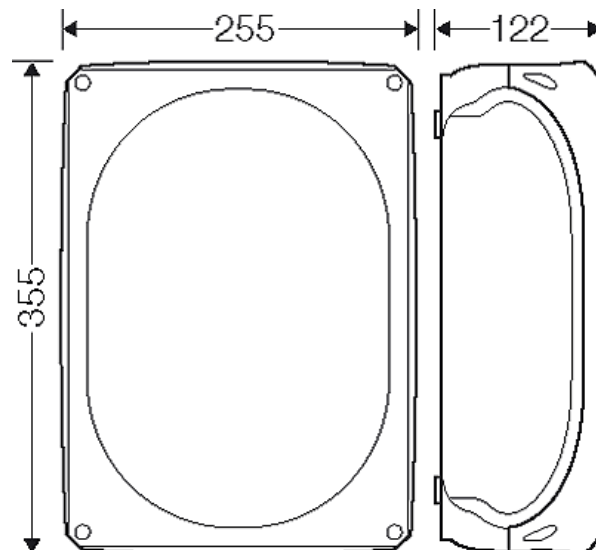

Dimension drawing

## Main line branch terminals




### DK 5035 S


- 6-35 mm<sup>2</sup>, Cu

IP  
66

Detail mass

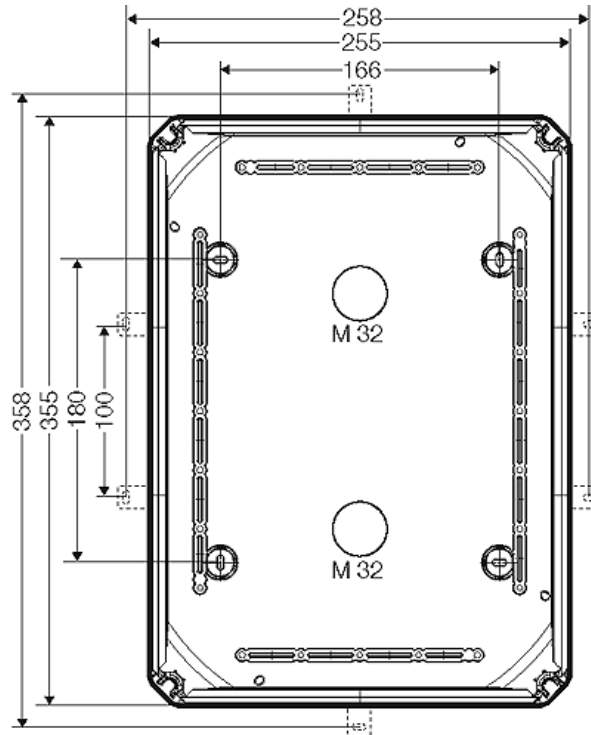

Box walls

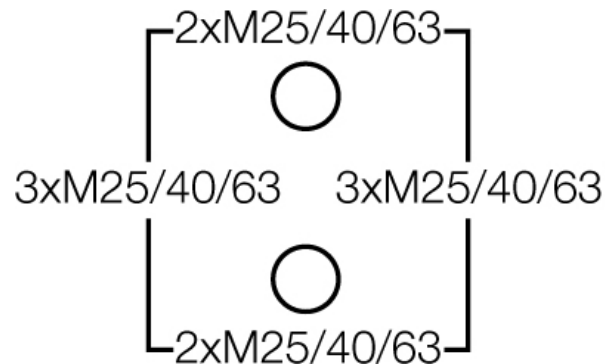

## Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Ambient temperature	Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 25 °C
Relative humidity	50% at 40° C short-time 100% at 25° C

Fire protection in the event of internal faults

Demands placed on electrical devices from standards and laws  
Minimum requirements  
- Glow wire test in accordance with IEC 60695-2-11:  
- 650°C for boxes and cable glands  
- 850°C for parts of insulating material necessary to retain current carrying parts in position

Burning behaviour

Glow wire test IEC 60695-2-11: 750 °C  
UL Subject 94: V-2  
flame-retardant  
self-extinguishing

Degree of protection against mechanical load

IK07 (2 Joule)

Toxic behaviour

halogen-free  
silicone-free  
"halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2

Note:

For material properties see technical data.