


For cable trunking and conduit installation

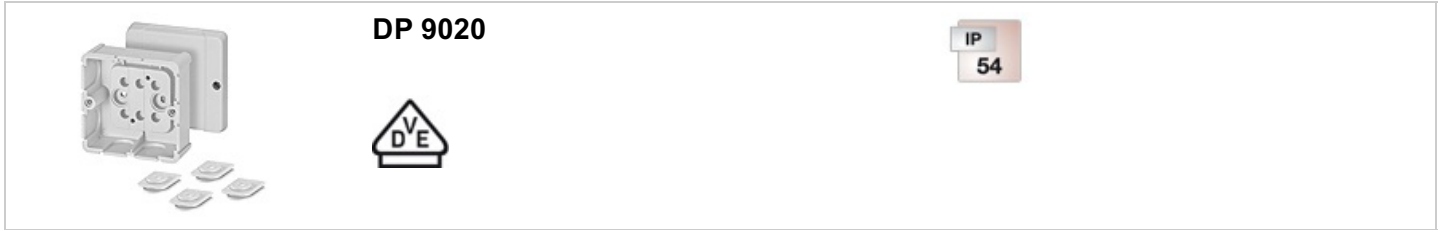


- without terminals
- for cable trunking and conduit installation
- included cable entry: 4 DPS 02, sealing range Ø 10-13,5 mm
- colour: grey, RAL 7035


rated insulation voltage	U _i = 690 V a.c./d.c.
material	PS (Polystyrene)
degree of protection	IP 54
mounting width	59 mm
mounting height	66 mm
max. installation depth	33 mm
width	88 mm
height	88 mm
depth	49 mm
weight	0,123 kg
in accordance with	IEC 60670-22

Drawings


Dimension drawing

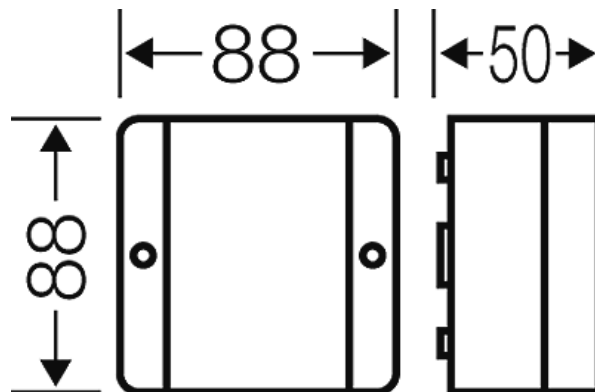


For cable trunking and conduit installation

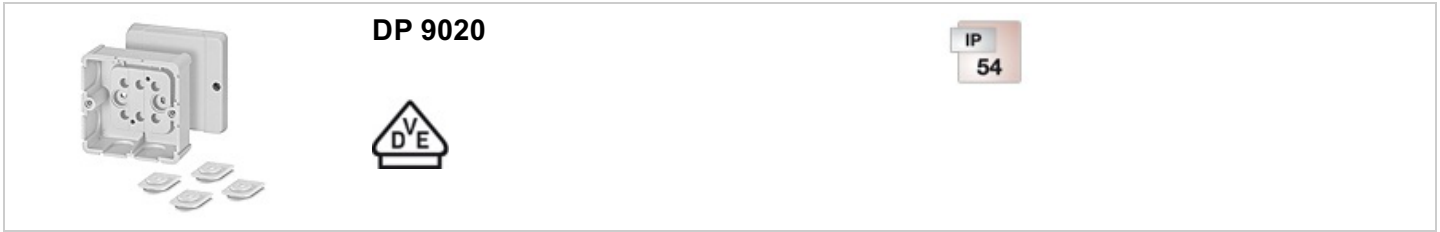


Detail mass

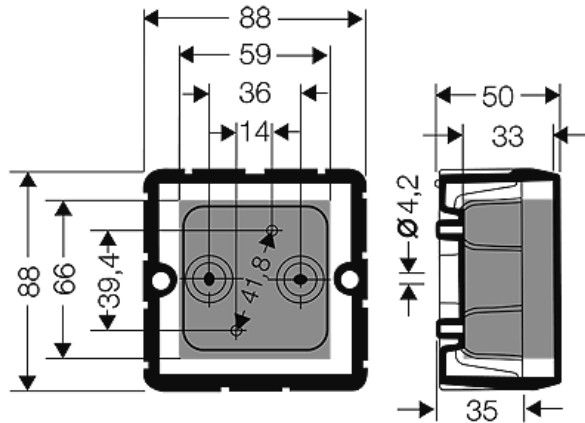

Box walls

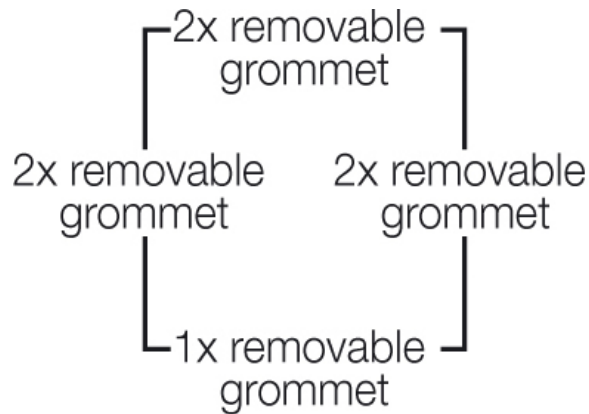


Box walls

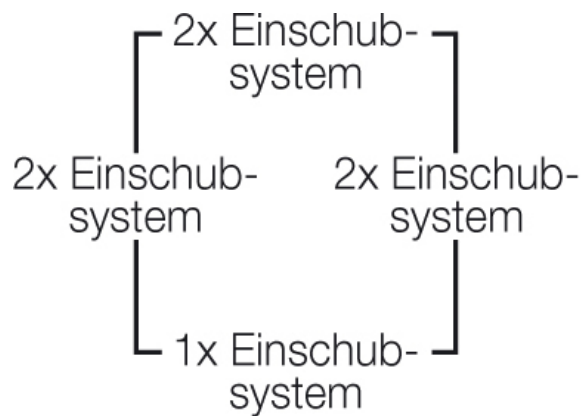

Operating and ambient conditions

Application area: Suitable for indoor installation and outdoor installation, protected

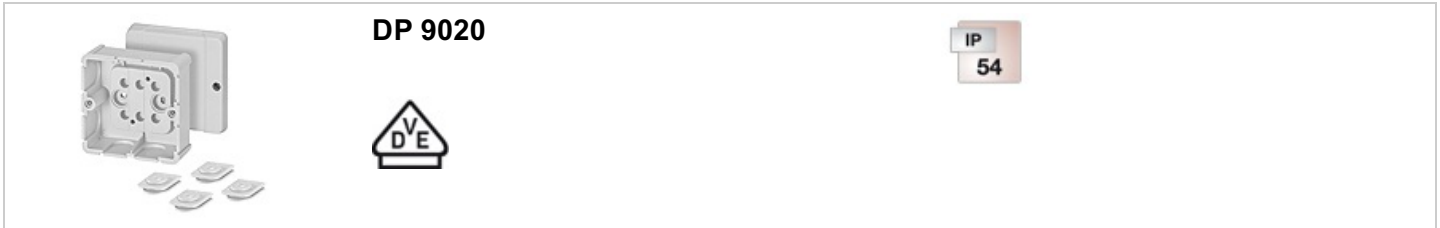

	<ul style="list-style-type: none"> - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2
Note:	For material properties see technical data.