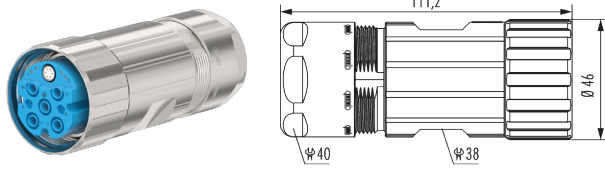

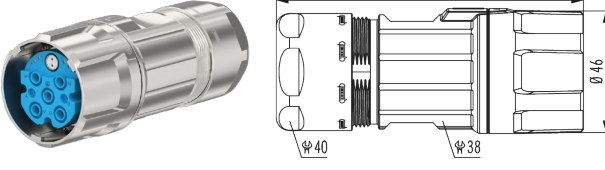

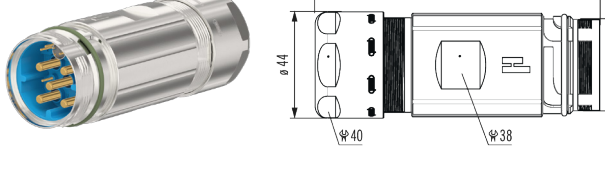

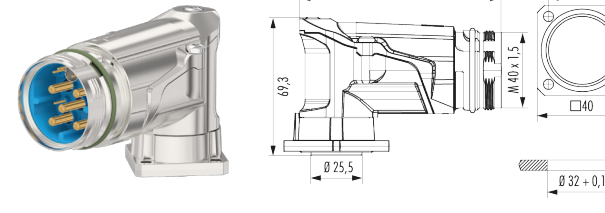



M 40 HYBRID (SIZE 1,5)

Housings with inserts

Straight Connector, Female Thread		Cable-Ø	Part Number
		2 + 6 + 4 + PE, insert for sockets 13 – 18 mm (.51 – .71")S7.710.662.000 17 – 24 mm (.67 – .97")S7.710.666.000 21 – 28 mm (.83 – 1.10")S7.710.862.000	
		6 + 6 + 4 + PE, insert for sockets 13 – 18 mm (.51 – .71")S7.710.762.000 17 – 24 mm (.67 – .97")S7.710.766.000 21 – 28 mm (.83 – 1.10")S7.710.866.000	
Straight Connector, Male Thread TWILOCK-S		Cable-Ø	Part Number
		2 + 6 + 4 + PE, insert for sockets 13 – 18 mm (.51 – .71")S7.716.662.00S 17 – 24 mm (.67 – .97")S7.716.762.00S 21 – 28 mm (.83 – 1.10")S7.716.862.00S	
		6 + 6 + 4 + PE, insert for sockets 13 – 18 mm (.51 – .71")S7.716.666.00S 17 – 24 mm (.67 – .97")S7.716.766.00S 21 – 28 mm (.83 – 1.10")S7.716.866.00S	
Straight Connector, Male Thread TWILOCK-S		Cable-Ø	Part Number
		2 + 6 + 4 + PE, insert for pins 13 – 18 mm (.51 – .71")S7.720.662.00S 17 – 24 mm (.67 – .97")S7.720.762.00S 21 – 28 mmS7.720.862.00S	
		6 + 6 + 4 + PE, insert for pins 13 – 18 mm (.51 – .71")S7.720.666.00S 17 – 24 mm (.67 – .97")S7.720.766.00S 21 – 28 mm (.83 – 1.10")S7.720.866.00S	
Right Angle Panel Connector, Male Thread, rotatable TWILOCK-S		Cable-Ø	Part Number
		2 + 6 + 4 + PE, insert for pins 13 – 18 mm (.51 – .71")S7.749.062.00S	
		6 + 6 + 4 + PE, insert for pins Panel hole 13 – 18 mm (.51 – .71")S7.749.066.00S	